



WIRELESS NETWORK-BASED AIR POLLUTION MONITORING SYSTEM - MODELING

Mahdi Babaiein ,Neyriz, Iran

Mahdi Babaiein @ Neyriz .edu.iran

Article Info

Received: 17-03-2013

Revised: 21 -04-2013

Accepted: 06-05-2013

Published:15/06/2013

Abstract

One of the insurmountable environmental problems is air pollution. Air pollution levels have been steadily rising throughout the country as a consequence of increased industrialization and urbanization. Both humans and other forms of life are vulnerable to the harmful effects of these contaminants. Opsi, Codel, Urac, and TAS-Air metrics are some of the available pollutant emission monitoring systems, however they may be rather expensive. Also, because of how these systems work, they can't be mounted on chimneys. Because of this, difficulties with health might arise in the neighborhoods around the factories, since they are not regulated. In this research, we provide a wireless sensor network (WSN)-based system for monitoring industrial air pollution. Using the zigbee communication protocol, this system is interoperable with the GSM network. Sensor nodes, a control center, and a database are the main components of the system. The database stores sensing data for future planning and historical purposes. Companies may use the suggested approach to track the levels of CO, SO₂, and dust produced by their processes, which are all byproducts of industrial emissions.

Keywords: Concepts related to air pollution, Zigbee, GSM, and network topology.

INTRODUCTION:

Pollution of the natural environment has become an international epidemic due to the rapid pace of industrialization and urbanization throughout the globe. Air, water, and soil pollution are all forms of environmental contamination. Contaminants and pollutant compounds in the air may have negative impacts on human health and wellbeing as well as other ecosystems [1]. Vehicle emissions, industrial emissions, and volatile organic compound emissions are the most common sources of these harmful pollutants. Air pollution exacerbates preexisting respiratory and heart disorders and causes difficulties breathing and coughing. Nearly 2.5 million of the 2.4 million annual fatalities caused by air pollution are attributed to indoor air pollution, according to the World Health Organization [2]. Attention must be directed on air pollution monitoring operations in light of the facts stated above. A growing number of air pollution monitoring systems are being developed with wireless connectivity in mind, thanks to advancements in communication, networking, and remote sensing technologies [3]. The development of wireless sensor networks (WSN) has been rather fast in the last few years. The benefits, which range from cheap cost and simplicity to liability, are applicable to a wide range of applications, from military to industrial controllers. A kind of self-configuring network, wireless sensor networks (WSNs) include a vast number of inexpensive, power-efficient, multi-functional sensor nodes. Compact and lightweight, these wireless sensor nodes can detect and respond to a wide range of physical and environmental factors, including but not limited to: sound, temperature, humidity,



pressure, velocity, and so on. These sensor nodes may transmit data across the network to their designated destinations thanks to their short-range wireless communication capabilities. Due to the rapid and unpredictable addition or removal of wireless sensor nodes, it is not necessary to predetermine their positions in a WSN [4]. A WSN connects the physical and virtual worlds. At huge sizes and with great resolution, it can examine terrestrial ecosystems and the spots where fixing the wired system is impossible. The properties of the WSN make it suitable for a broad variety of applications, including automation in industrial settings, monitoring in agriculture, health care, air pollution, security systems, etc.

1. RELATED WORK

A number of air quality monitoring systems have been developed by researchers. For instance, In 2008, Völgyesi, P. et al introduced a Mobile Air Quality Monitoring Network (MAQUMON) that utilized moving vehicles equipped with sensor nodes to monitor air quality in a large area [5]. Each sensor node consisted of a microcontroller, an on-board Global Positioning System (GPS) unit, and a set of sensors to detect the concentrations of ozone (O₃), Carbon Monoxide (CO), and nitrogen dioxide (NO₂). The node was able to send the sensed data to the gateway in a car through the Bluetooth connection. When the car moves, the sensor node detects the concentrations every minute and store the data tagged with location information into a memory. When the car moves to a Wi-Fi hotspot, the gateway in the car transmits the data to the server, and the data would be processed and published on the sensor Map portal. MAQUMON provides a record regarding air quality and pollutant dispersion within the area. But this monitoring system could not immediately send the monitoring data back.

Kavi K. Khedo, et al [6] proposed an innovative system named Wireless Sensor Network Air Pollution Monitoring System (WAPMS) to monitor air pollution in Mauritius through the use of wireless sensors deployed in huge numbers around the island. In order to improve the efficiency of WAPMS, they designed and implemented a data aggregation algorithm named Recursive Converging Quartiles (RCQ). The algorithm is used to merge data to eliminate duplicates, filter out invalid readings and summarize them into a simpler form which significantly reduce the amount of data to be transmitted to the sink and thus saving energy. For better power management they used a hierarchical routing protocol which causes the nodes to sleep during idle time.

North, R., et al developed An integrated mobile environmental sensing system [7] to support the management of transport and urban air quality. Sensor nodes are deployed on vehicles and infrastructure to monitor traffic, weather and pollutant concentrations at far higher spatial and temporal resolutions and send data into a dynamically configurable computing platform that supports both near real-time incident management and longer term strategic planning decisions.

The work done by Jelicic et al. [8] introduces an Indoor Air Quality monitoring (IAQ) system using a sensor network that integrates a power management approach to reduce sensors energy consumption by using an adaptive duty cycling mechanism for metal oxide semiconductor (MOX) gas sensors.

The work done by Liu et al. [9] proposes a Wireless Sensor Network (WSN)-based urban air quality monitoring system that is connected to a GSM system for centralized control by a LabVIEW program that stores sensed data in a database. They implemented the monitoring systems in the city road of Taipei to monitor the carbon monoxide (CO) concentration caused by vehicle emissions.

2. NETWORK TOPOLOGY

The network is composed of many nodes which are interacting with each other by transmitting and receiving data over communication channels. In this paper, the network protocol which we are using for communication is Zigbee. The Zigbee network model supports star, tree and mesh topologies as shown in fig. 1. The Zigbee coordinator (ZC) is responsible for initiating and maintaining the devices on the network, and all other devices.



Zigbee end (ZE) devices and Zigbee routers (ZR), can directly communicate with the Zigbee coordinator depending with the network topology used. In mesh and tree topologies, the coordinator (ZC) is responsible for initiating the network with default values and for choosing certain key network parameters but the network may be extended through the use of routers.

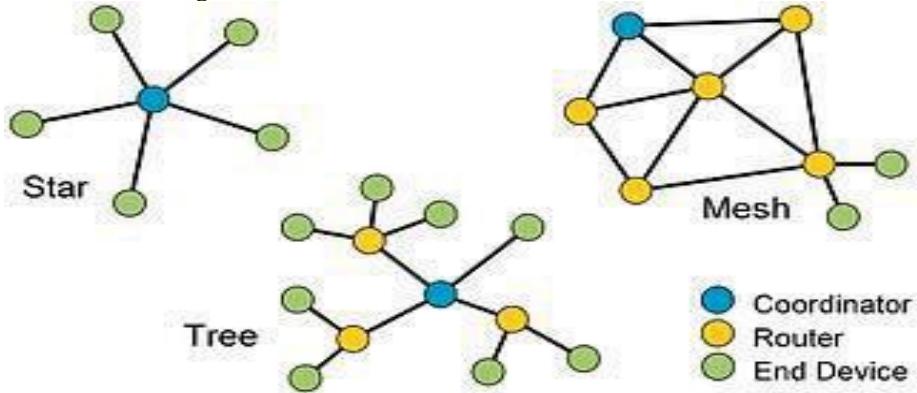


Fig.1: Network topologies [7]



In Star topology, all the devices of network are connected to the central device which may be a hub, a router or a switch. All the workstations are connected to central device with a point-to-point connection. So it can be said that every node is indirectly connected to every other node by the help of 'hub'. All the data on the star topology passes through the central device before reaching the intended destination. Hub acts as a junction to connect different nodes present in Star Network, and at the same time it manages and controls the whole network. Depending on which central device is used, hub can act as repeater or signal booster. Central device can also communicate with other hubs of different network.

The Tree topology is a generalization of the Bus topology. A tree topology combines characteristics of linear bus and star topologies. It consists of groups of star-configured workstations connected to a linear bus backbone cable. Tree topologies allow for the expansion of an existing network.

In a mesh topology, any device is allowed to attempt to contact any other device either directly or by taking advantage of routing-capable devices to relay the message on behalf of the message originator. In this topology, the route from the source device to the destination is created on demand and can be modified if the environment changes. The capability of a mesh network to create and modify routes dynamically increases the reliability of the wireless connections. Incase, for any reason, the source device cannot communicate with the destination device using a previously established route, the routing capable devices in the network can cooperate to find an alternative path from the source device to the destination device [10]

3. ZIGBEE STANDARD

A Zigbee standard is a short range, low power, and low data rate wireless networking technology for many real time application. It specifies the three bottom layers (Physical, Data Link, and Network), as well as an Application Programming Interface (API) based on the 7-layer OSI (Open System Interconnection) model for layered communication systems. Fig. 2 shows the layered architecture adopted by the alliance industries. It should be noted that the Zigbee Alliance choose to use an already existing data link and physical layer specifications. These specifications are IEEE 802.15.4 standards for low rate personal area networks (PAN).



Fig. 2 Zigbee communication layers [7].

The IEEE 802.15.4 standard supports three frequency bands of operation: 868 MHz (in Europe), 916 MHz (in the United States) and the 2.4GHz bands (worldwide). 2.4GHz bands are most commonly used throughout the world because of ISM (Industrial, Scientific, and Medical) band. In addition this band facilitates the highest achievable data rate of 250Kbps and 16 communication channels between 2.4GHz and 2.4835GHz at the physical layer [11]. Typical communication distances are within the range from 30 meters in an indoor/non-line of sight environment to over 100 meters in a line of sight environment depending on specifications of module. Zigbee modules employ dipole type antenna to increase gain of antenna[12].

4. HARDWARE ARCHITECTURE

The proposed system is designed by integrating the following hardware modules as shown in figure 3.

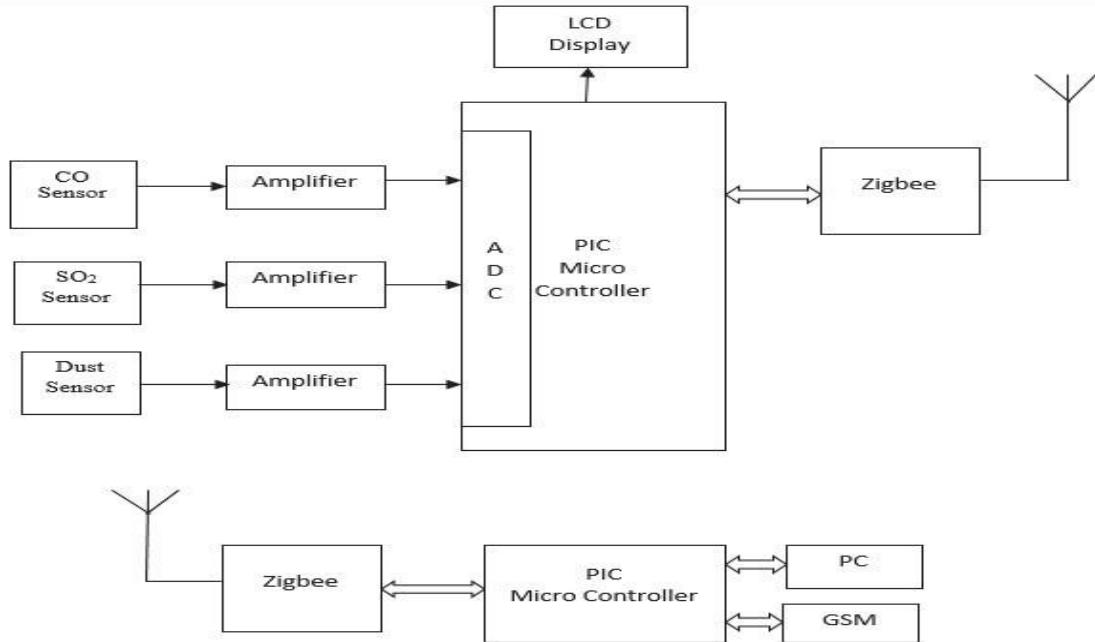


Fig. 3 System hardware architecture block diagram

4.1 PIC16F887 microcontroller

The PIC16F887 microcontroller is the main component of this system and it acts as a brain of the system. The operating system that runs inside this chip coordinates the substances measurement process, the acquisition of the GSM Modem and the data transmission to the central server for our case is personal computer connected to internet. The microcontroller is provided with an RS232 serial communication to the Zigbee modem and GSM Modem and a parallel connection to the gas and dust sensors. There is an amplifiers between the sensors and the PIC16F887 microcontroller because of the very small output voltages provided by the sensors (mA).

4.2 Sensors Array

The sensor array consists of three air pollutant sensors which are Carbon monoxide (CO), Sulfur dioxide (SO₂) and Dust. Each of the above sensors has a linear current output in the range of 4–20 mA. The 4 mA output corresponds to zero-level and the 20 mA corresponds to the maximum level. A simple signal conditioning circuit is designed to convert the 4–20 mA range into 0–5 V to be compatible with the voltage range of the built-in analog-to-digital converter in the PIC microcontroller.

4.3 Zigbee Modules

The Zigbee module is hardware platform of wireless device. The modules realize the basic function of Physical and MAC layers, such as transmit and receive, modulation and demodulation, channel and power control. In this system, two types of Zigbee modules have been used to organize the network, i.e Zigbee coordinator modem (ZCM) and Zigbee end devices (ZED). The ZCM is responsible for coordinating and collecting data from ZED and maintaining the network, and ZEDs are responsible for sending data collected from sensors, directly to ZCM. The modules include a digital direct sequence spread spectrum base band modem and an effective data rate of 250 kbps.

4.4 Central Server

The Central Server is a personal computer with accessibility to the Internet. The Pollution Server is connected to the Microcontroller with Zigbee coordinator modem via RS-232 communication standard. The air pollution



information sent from each ZED are collected to ZCM and then the data are saved to database of central server.

4.5 *GSM modem*

Global System for Mobile Communications (**GSM**) modems are specialized types of modems that operate over subscription based wireless networks, similar to a mobile phone. A GSM modem accepts a Subscriber Identity Module (SIM) card, and basically acts like a mobile phone. This type of modem is an external device connected via a USB cable or a serial cable. In this project, the GSM modem is connected to the Microcontroller via Max

232(level converter). If the received data values exceeds the limit values, the modem will send the alerting message with the current values to the responsible person and Authorities.

5. SIMULATION RESULTS

The simulations have been performed using the Proteus software and MicroC Pro. for PIC. The designed sensor array consist of CO, SO₂, and dust sensors. These sensors are connected to the PIC16F887 microcontroller, as shown in Fig. 3 below. The sensor output voltages representing the level of each pollutant were converted to a mg/m³ value and simultaneously these data are sent to the database to be displayed.

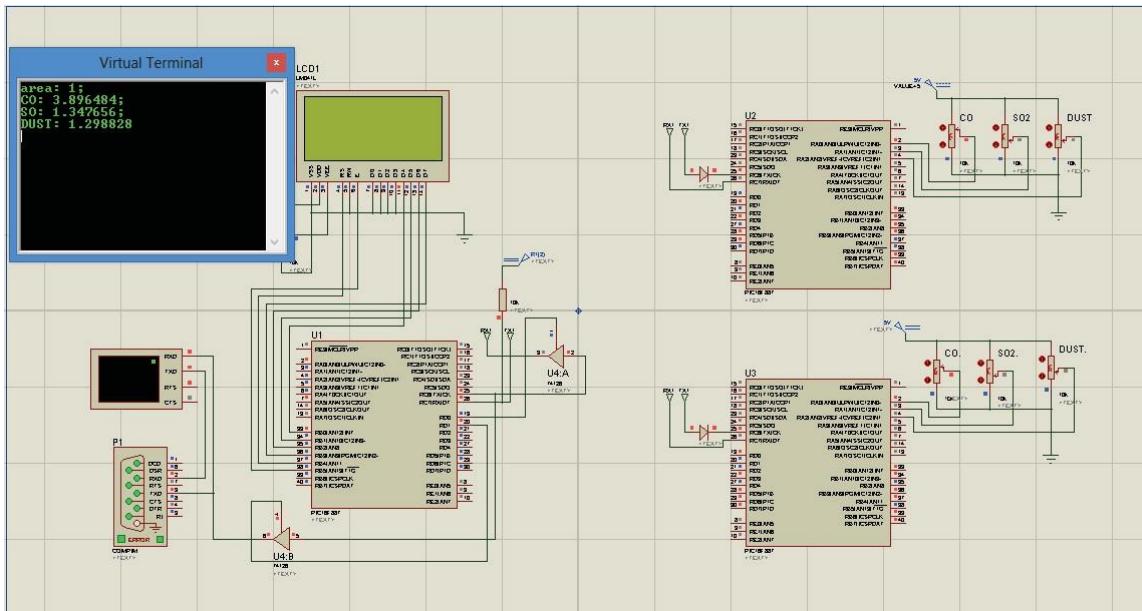


Fig. 3.1 Pollutant measurement at area 1

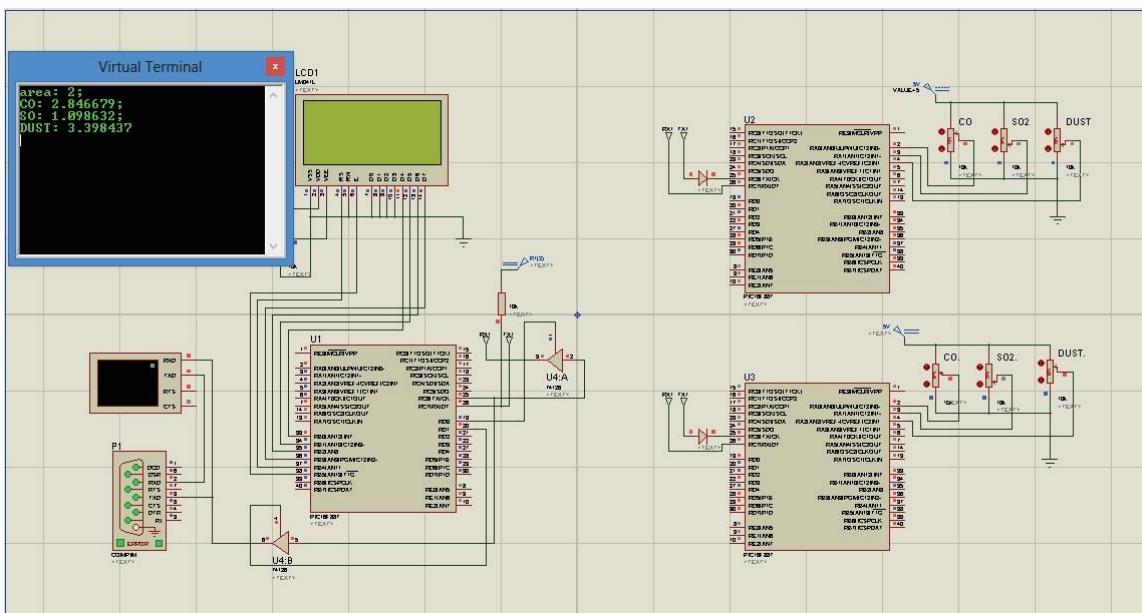


Fig. 3.2 Pollutant measurements at area 2

The microcontroller generates a frame consisting of the acquired air pollutant level from the sensors array and then upload it to the Zigbee modem and transmit it to the Central-Server via Zigbee network. The Zigbee modem connected to the central server via RS-232 interface receives the transmitted frame and the pollutant data displayed



on the central server as shown in fig. 4.

Figure 4 shows the live environmental monitoring in which the pollutant values are displayed showing date and time received. It displays the data values (CO, SO₂ and dust) of particular area after every 1 minute.

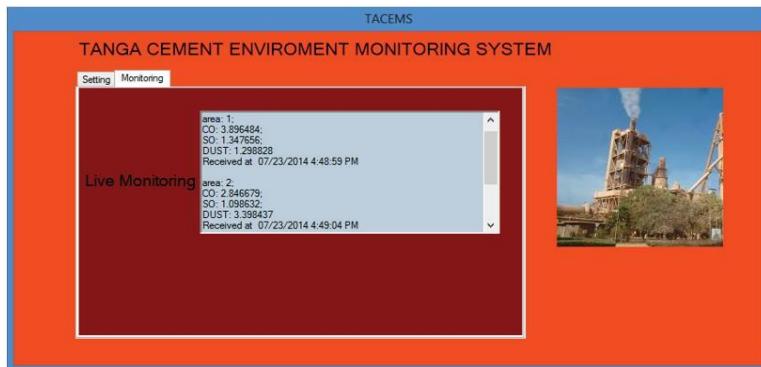


Fig 4. The live environmental monitoring faceplate

This system can be used for monitoring the concentration of air pollutants both at the indoor as well as at the outdoor environment.

CONCLUSION & FUTURE WORK

In this study, we provide a wireless network-based air pollution monitoring system that measures hazardous air pollutants in real-time using the Proteus software. Cement plants in Sub-Saharan African nations, where most sectors still rely on antiquated, wired systems, are the target users of our system's environmental monitoring capabilities. We want to use our created technology in a wide variety of Tanzanian producing sectors in the future, as air pollution is not a major problem in many of them. Results should throw light on our system's efficacy and performance, and provide information that policymakers may use to strengthen air pollution rules, according to our expectations.

References

1. Vallero, D., Academic Press, 2007. Fundamentals of air pollution. Indoor air pollution in underdeveloped nations and children's acute lower respiratory infections (Smith, K.R., et al., 2). This article is from Thorax magazine, volume 55, issue 6, pages 518-532, published in 2000.
3. Zhang et al., A ZigBee-based wireless solution for greenhouse monitoring and control. Science A, Journal of Zhejiang University, 2007, 8(10): 1584–1587.
- “Wireless sensor networks: a survey” by Akyildiz et al. Vol. 38, No. 4, 2002, pp. 393–422.
5. In the 2008 IEEE Computer Society conference proceedings on information processing in sensor networks, Völgyesi et al. discuss sensormap for air quality monitoring.
- The authors of the paper "A wireless sensor network air pollution monitoring system" are K.K. Khedo, R. Perseedoss, and A. Mungur. 2010. The preprint may be found at arXiv:1005.1737.
7. In Circuits and Systems, North et al. provide a mobile environmental sensing system for managing urban air quality and traffic. 2008. The ISCAS In 2008, the IEEE held its International Symposium on.
8. Jelicic, V., et al. A wireless sensor network for smart gas monitoring: design, characterisation, and management. In Advances in Sensors and Interfaces (IWASI), 2011 4th IEEE International Workshop on., 2011. IEEE.
9. Liu, J.-H., et al. created a wireless sensor network-based system for monitoring urban air quality. The work was presented at the 2011 IEEE International Conference on Sensing Technology (ICST). ZegBee wireless networks and transceivers, S. Farahani. Newnes, 2011. 10.
11. The research was conducted by Jung et al. The 2008 International Geoscience and Remote Sensing Symposium (IGARSS) included a geosensor network-based air pollution monitoring system. Proceedings of the 2008 IEEE International Conference on. 2008.
12. 4. Summary of Ergen's ZigBee/IEEE 802.15. Berkeley, California, USA, September 2004. 10.